

GLORIA®

Safety First

Fat Fire Extinguisher FA 3/6 EASY



GLORIA®



Safety First

GLORIA GmbH | Diestedder Straße 39 | 59329 Wadersloh
Telefon +49 (0)2523 79349-900 | Telefax +49 (0)2523 79349-93
info@gloria.de | www.gloria.de

■ Main Advantages of FA EASY

- Burning fat can easily exceed a temperature of more than 1000 °C, is self-igniting and requires a robust and absolutely safe fire extinguishing unit to prevent flash fires or even fat explosions.
- Fluorine-free extinguishing agent: 3 and 6 litre special extinguishing agent, without environmentally harmful PFAS.
- Special 5-hole fine spray nozzle enables ideal application of extinguishing agent.
- Extinguishing agent and special spray insert enable maximum achievable rating of 75F with just 3 litres of agent.
- Can be used on electrical installations up to 1000 volts, minimum distance 1 m.
- Good carrying option due to stable hand lever.

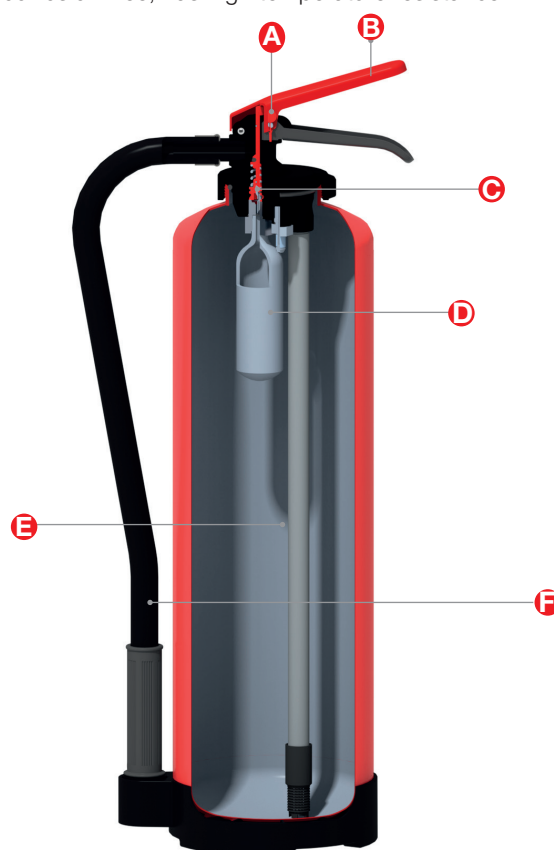
■ Details and Features of FA EASY



- Suitable for use in fire classes A and F
- GLORIA fat fire extinguishers are frost-proof down to -5 °C
- Reignition is reliably prevented
- Uniform, high-strength, glass-fibre reinforced special plastic valve body. In addition, it is robust, has high tensile strength, is stable, has high chemical resistance, is moisture-resistant, corrosion-free, has high temperature resistance and is UV-resistant
- All valve components with standardised screw connection
- Uniform neck ring M 74
- Uniform black anodised metal locking collar
- Ageing-resistant hose assembly
- Durable screen printing with colour code
- Yellow colour code indicates fat fire extinguishing agent
- With stable wall bracket
- Areas of Use:   **

■ Cross-section FA 6 EASY

Mode of operation

- Pull the **metal safety pin A**.
- By shortly pressing down the **lever B** for the first time, the **piercer C** punctures the **CO₂ cartridge D**.
- CO₂ abruptly flows into the container.
- By pressing down the **lever B** again, the extinguishing agents gets through the **dip tube E** into the **hose assembly F**.
- By releasing the **lever B** the extinguishing stream is disconnected.



Model	Art.-No.	Extinguishing Agent	Type	Propellant	Extinguishing Performance LE*		Discharge range / time	Temperature Range	Total weight	H/W/D in bracket ø – cylinder
 FA 3 EASY	814101.0000	Fat fire agent	W 3 H	CO ₂	8A 2	75F 9	ca. 4 m ca. 30 sec.	-5 °C to +60 °C	ca. 6,8 kg	ca. 432/270/165 mm 150 mm
 FA 6 EASY	814111.0000	Fat fire agent	W 6 H	CO ₂	13A 4	75F 9	ca. 4 m ca. 50 sec.	-5 °C to +60 °C	ca. 12,3 kg	ca. 600/270/165 mm 150 mm

* LE = If fire extinguishers are intended for both fire classes A+B, the lower extinguishing agent unit value applies for the calculation. For kitchen operations with deep fat fryers up to max. 50 litres, the DGV (Rule GUV-R111) stipulates the use of at least one fire extinguisher with proven suitability for extinguishing fires involving cooking oil and fat, with a preferred content of 6 litres. For deep fat fryers with a capacity of up to 100 litres, either at least three fire extinguishers with proven suitability or a fixed extinguishing system must be provided.