



### ■ Main advantages of SBF PRO

- Available in 6 and 9 litre versions
- Proven GLORIA strike-knob activation
- Robust handle made of glass-fibre reinforced plastic with ergonomic carrying properties
- Laser-welded pressure cylinder
- Exterior coated with durable polyester resin powder coating
- Long-lasting plastic inner coating to protect against corrosion.
- Certified according to Pressure Equipment Directive 2014/68/EU (CE)
- Uniform, high-strength, glass-fibre reinforced special plastic valve body
- High temperature, ozone and UV resistant
- In addition, high chemical resistance, moisture-resistant and corrosion-free
- Uniform neck ring, thread size M74x2
- Uniform, black anodised metal locking collar
- Internal propellant bottle with stainless steel adapter and corrosion-resistant plastic coating. (technical data marked with resistant laser printing)
- Ageing-resistant, LABS-free quality hose assembly with fabric insert made of synthetic rubber material.
- Rotatable and stoppable extinguishing pistol for ideal fire fighting.
- Robust, impact-resistant plastic skirt with hose nozzle bracket ensures stability and protection of the unit against damage and corrosion.


### ■ Details and Features of SBF PRO

- GLORIA foam with impregnating effect on the source of the fire and surroundings
- Special foam nozzle with high surface coverage enables optimum application of the extinguishing agent
- Reignition is largely suppressed.
- Areas of application:     

### ■ Cross-Section SBF 6 PRO

#### Mode of operation

- Pull the yellow **safety device A**.
- When the **strike-knob B** is pressed, the **piercer C** punctures the **CO<sub>2</sub>-cartridge D**.
- CO<sub>2</sub> flows abruptly into the cylinder. The foam mixture flows through the **dip tube E** into the **hose assembly F**.
- The rotatable **extinguishing pistol G** enables targeted fire fighting over a large area.

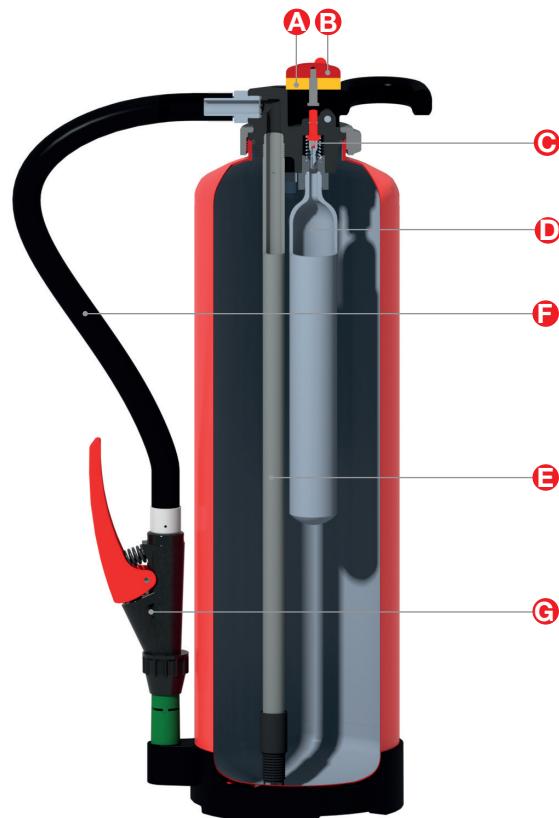

Type	Art.-No.	Extinguishing agent!	Model	Propellant	Extinguishing Performance LE*	Discharge range / -time	Temperature range	Total weight	H/W/D in bracket ø – cylinder
 SBF 6 PRO	814171.0000	Premix	S 6 H	CO <sub>2</sub>	21A 113B 6 6	ca. 4 m ca. 35 Sec.	-20 °C to +60 °C	ca. 10,1kg	ca. 550/280/165 mm ø 150 mm
 SBF 9 PRO	814181.0000	Premix	S 9 H	CO <sub>2</sub>	27A 183B 9 12	ca. 4 m ca. 48 Sec.	-20 °C to +60 °C	ca. 15,3 kg	ca. 585/280/205 mm ø 190 mm

\*extinguishing agent units. If fire extinguishers are provided for both fire classes A+B, the lower LE value applies for the calculation.